



You have downloaded a document from
RE-BUŚ
repository of the University of Silesia in Katowice

Title: Application of passive seismic to shallow geological structures in urban areas

Author: Maciej J. Mendecki, Michał Glazer, Mateusz Mycka

Citation style: Mendecki Maciej J., Glazer Michał, Mycka Mateusz. (2014). Application of passive seismic to shallow geological structures in urban areas. "Studia Quaternaria" (Vol. 31 (2014), s. 115-122), s. 705-716), doi 10.2478/squa-2014-0012



Uznanie autorstwa - Użycie niekomercyjne - Bez utworów zależnych Polska - Licencja ta zezwala na rozpowszechnianie, przedstawianie i wykonywanie utworu jedynie w celach niekomercyjnych oraz pod warunkiem zachowania go w oryginalnej postaci (nie tworzenia utworów zależnych).



UNIwersytet ŚLĄSKI
W KATOWICACH



Biblioteka
Uniwersytetu Śląskiego



Ministerstwo Nauki
i Szkolnictwa Wyższego

APPLICATION OF PASSIVE SEISMIC TO SHALLOW GEOLOGICAL STRUCTURES IN URBAN AREAS

Maciej Jan Mendecki¹, Michał Glazer², Mateusz Mycka¹

¹ Department of Applied Geology, Faculty of Earth Sciences, University of Silesia, Będzińska 60, 41-200 Sosnowiec, e-mails: maciej.mendecki@us.edu.pl, matueszmycka@gmail.com

² Department of Geomorphology, Faculty of Earth Sciences, University of Silesia, Będzińska 60, 41-200 Sosnowiec, e-mail: m.glazer@o2.pl

Abstract

To study the shallow geological structure the Refraction Microtremor (ReMi) method was applied. This technique uses seismic noise analysis where a source of this small vibrations is the human activity e.g.: traffic, production, factories. The surveys were carried out in selected urban areas in the region of the Upper Silesian Industrial District: Sosnowiec–Pogoń, Chorzów–Chorzów Stary and Bytom–Karb. Each area is characterized by the presence of nearby roads with a very high traffic. The results of passive seismic (ReMi) were confronted with data obtained using Multichannel Analysis of Surface Waves (MASW) and resistivity imaging (RI). Seismic surveys were performed by apparatus PASI with 24 channels using geophones of 4.5Hz. The results showed that passive seismic can be satisfactorily used in such urban conditions. The shallow geological structure interpreted by seismic methods have been well-correlated with resistivity studies.

Key words: passive seismic, Refraction Microtremor (ReMi), seismic noise, Multichannel Analysis of Surface Waves (MASW), Resistivity Imaging (RI), urban area.

Manuscript received 30 April 2014, accepted 30 October 2014

INTRODUCTION

Seismic noise is a ubiquitous ground vibration which propagates in the subsurface layers as a combination of Rayleigh and Love's waves. Seismic noise is caused by natural and anthropogenic sources. Vibration of natural origin (microseisms) differ from those artificially produced (microtremors). Microseisms are generated by sea and ocean waves, whereas microtremors are caused by all human activity such as traffic, industry, plant working etc. Differences exist between microseisms and cultural noise are observed in different values of the frequency band, the type of wave and generated wave modes what can be noticed in Table 1 (Nakamura 1989, Mendecki 2012).

In urban areas the seismic noise level is usually very high, which makes standard seismic survey difficult. Especially concerning the shallow method of seismic refraction and reflection. A source of this small vibrations is the human activity e.g.: traffic, production, factories. Seismic noise vibrations propagate through the subsurface layer, mainly in the form of Rayleigh waves, and finally are recorded and processed by seismic standard equipment. Passive seismic became popular tool to recognize shallow geological structure after work of Louie (2001) who gave fundamental aspects allowing to calculate the parameters of subsurface layers.

Louie (2001) in his work based on earlier studies of Liu *et al.* (2000), Satoh *et al.* (1997) and for instance Xia *et al.* (1999). In 21st century many papers was established using the Rayleigh wave dispersion curve inversion obtained from non-source seismic. The survey result is vertical profile of wave velocities and elastic parameters changing with depth, what was presented by Pullammanappallil *et al.* (2003), Dal Moro *et al.* (2007) Rosenblad and Li (2009) Boiero and Socco (2011) Hamimu *et al.* (2011), Strobbia *et al.* (2011), Mendecki *et al.* (2012) and many other. The information obtained from seismic measurements is very often useful for geo-engineering studies, especially in urban areas where large-scale infrastructures are formed e.g. Lambert *et al.* (2007) used the Refraction Microtremor (ReMi) data to determine shear wave velocity at an urban bridge rehabilitation sit. Many publications considered the application of passive seismic methods to study subsurface structures of subsurface soils and Quaternary sediments, e.g. Gamal and Pullammanappallil (2011) checked the validity of the Refraction Microtremors Method for different soil types in Egypt, Stephenson *et al.* (2005) applied passive and active seismic methods in Santa Clara Valley to compare the results with boreholes data to 200 m. Another example, showed the ReMi method application, was presented by Eker *et al.* (2012) who had studied the local site characterization and seismic zonation by utilizing

sq

Table 1
Characteristics of seismic noise (Mendecki 2012)

| Source type | Natural | Anthropogenic/cultural noise |
|---------------------------------|--------------------|-----------------------------------|
| Name (Nakamura 1989) | Microseisms | Microtremors |
| Frequency band | 0.1–0.5 to 1 Hz | 0.5 to 10 Hz |
| Origin | Ocean/wind | Traffic, industry, human activity |
| Type of generated wave | Surface wave | Surface + body waves |
| Emission of Rayleigh/Love waves | Rayleigh | Love and Rayleigh waves |
| Modes | Mainly fundamental | Fundamental and higher |

active and passive surface wave methods in the northern side of Ankara, Turkey. Similar studies can be found in study of Mendecki *et al.* (2012) where ReMi method was used as a tool to recognize the Quaternary sediments and the bedrock depth in Chorzów Stary, Poland.

SITE CHARACTERISTIC

Three sites were chosen to test the applications possibilities of the Refraction Microtremor (ReMi). All three sites are located near to heavy traffic roads in Upper Silesia Industrial District. Survey profiles were situated in cities: Sosnowiec, Bytom and Chorzów.

In city of Sosnowiec, Pogoń district, the measurement profile was near to three roads: express route S86, main route 94 and street Będzińska which is one of the main streets in Sosnowiec. The survey profile is located near to Czarna Przemsza river so in geological profile of study area occurs the river sediments: mainly sands and fluvial deposit. This about twenty-meter thick layers of quaternary complex covered Triassic limestone bedrock (Wagner *et al.*, 2009).

Second site is located in district of Karb, which belongs to city of Bytom. The survey profile is located near the cross-road of main route 88 and main route 94. Shallow geological situation is characteristic for Upper Silesian Coal Basin because over the Carboniferous bedrock occurs the thick layer of Triassic (the Buntsandstein and the Muschelkalk) and next is the layer of Quaternary which consist of sands, loamy sands and sandy loam (Razowska-Jaworek and Brodziński, 2009).

The last site was established in Chorzów, district Chorzów Stary. The measurement profile is adjacent to Siemianowicka Street. This site is characterized by the lowest traffic than presented profiles previously but still noisy. The study geological profile consists of Quaternary sands and loam sand, and dusty clays which are product of Carboniferous layer erosion. This complex covered Carboniferous mudstones and sandstones (Wyczółkowski, 1957, Cudak and Wantuch, 2009).

METHODOLOGY

In general the surface waves can be generated by two ways: “passive way” and “active way”. The active way means that seismic energy is intentionally generated at a specific location relative to the geophone spread and recording

begins when the source energy is imparted into the ground. This is in contrast to the passive way surveying, also called “microtremor surveying”, or as “refraction microtremor” surveying, where there is no time breaks and motion from ambient energy generated by cultural noise, wind, wave motion, etc. at various and usually unknown locations (Louie 2001, Pullammanappallil *et al.* 2003, Dal Moro *et al.* 2007, Rosenblad and Li 2009, Boiero and Socco 2011, Hamimu *et al.* 2011, Strobba *et al.* 2011). In this paper beside Refraction Microtremor technique the active method of Multichannel Analysis of Surface Waves had been applied (Park *et al.* 1999, Xia *et al.* 1999).

During study a linear arrays with 24 geophone channels connected to a recorder made by PASI company was applied. Twenty four of 4.5 Hz geophones were used to record surface waves and seismic noise. The spacing between geophones was 5 m, while the total profile length was 115 m offset (for active seismic) was in -5m of the profile. On each survey line ReMi and MASW methods were applied.

The both technique are based on two fundamental ideas: (1) common seismic-refraction recording equipment, set out in a way almost identical to shallow P-wave refraction surveys, can effectively record surface waves at frequencies as low as 4.5 Hz; and (2) a simple, two dimensional slowness-frequency (p-f) transform of a record can separate Rayleigh waves from other seismic arrivals and allow recognition of true phase velocity against apparent velocities (Louie 2001). Collected data were analysed by an application of software provided for the surface waves inversion procedure. The WinMASW program (Dal Moro *et al.* 2007), prepared by Eliosoft firm, has been applied to process survey result. In general, software employs the same mathematical technique to analyse active and passive records. Firstly, recorded data in time domain have been submitted for p- τ transformation. This transformation takes a record section of multiple seismograms, with seismogram amplitudes relative to distance and time (x-t), and converts it to amplitudes relative to the ray parameter p (the inverse of apparent velocity) and an intercept time τ (Louie 2001). The next step takes each p- τ trace and computes its complex Fourier transform intercept time direction (Louie 2001). This completes the transform of a record from distance-time (x-t) into p-frequency (p-f) space. The ray parameter p for these records is the horizontal component of slowness (inverse velocity) along the seismic spread (line). If one identifies trends within these axes where a coherent phase has significant power, then the slowness-frequency picks can be plotted for dispersion analysis (Louie 2001). Dispersive phases show the distinct curve of normal modes in low velocity surface layers: sloping down from high phase velocities (low slowness) at low frequencies to lower phase velocities (high slowness) at higher frequencies (Louie 2001). Dispersion, or change in phase velocity with frequency, is the fundamental property utilized in surface wave methods. One-dimension vertical changes of shear wave velocity (V_s) can be calculated by mathematical inversion of the dispersive phase velocity of surface waves. Surface wave dispersion can be significant in the presence of velocity layering, which is common in the near-surface environment. There are other types of surface waves, or waves that travel along a surface, but in this application we are con-

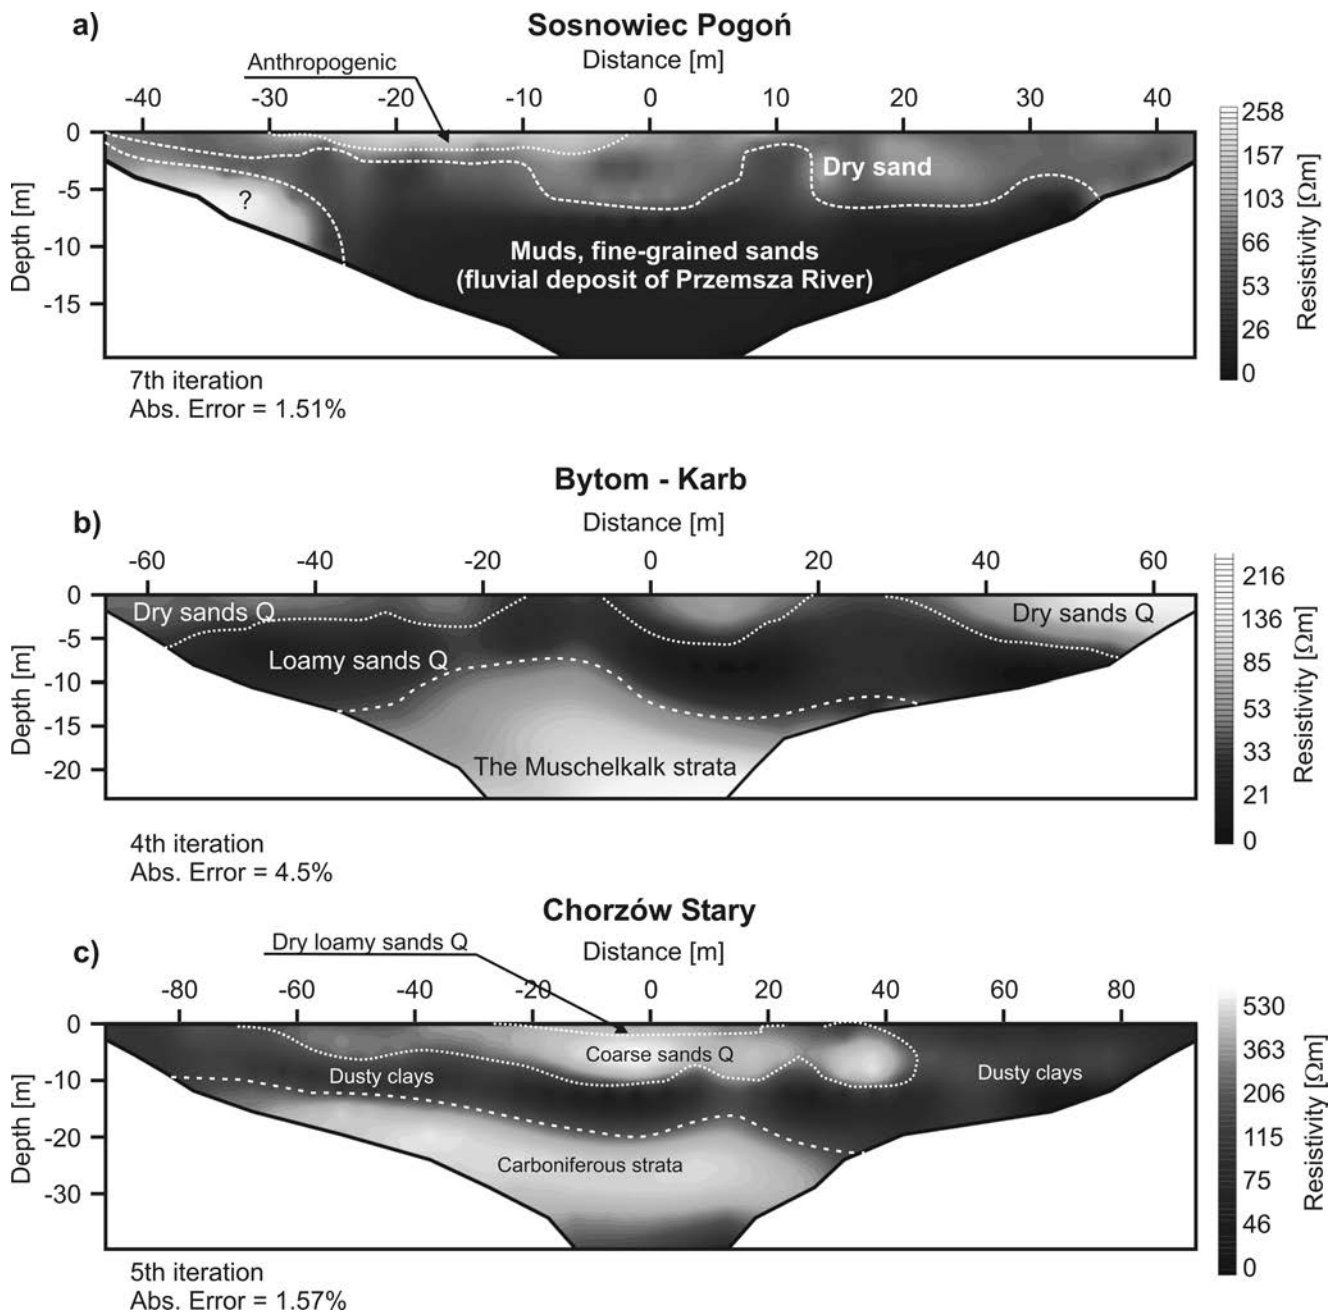


Fig. 1. Resistivity cross-sections with lithological interpretation: a) Sosnowiec, b) Bytom and c) Chorzów.

cerned with the Rayleigh wave, which is also called “ground roll” since the Rayleigh wave is the dominant component of ground roll (Xia *et al.* 1999, Louie 2001, Dal Moro *et al.* 2007).

Genetic Algorithms (GAs) have been proposed to find the best inverse solution and thus the appropriate VS model. Giancarlo dal Moro, author of WinMASW software, used GAs to solve the inversion of Rayleigh dispersion curve (Dal Moro *et al.* 2007). The fundamental aspect characterizing the Genetic Algorithms is evolutionary scheme that the fittest models survive and reproduce, the others disappear. The main advantage of this class of optimizations is that they tend to avoid the attraction of local minima and their random-but-driven search schemes try to reach an optimal solution by considering all of the regions of a user-defined search space.

The inversion process can stop after a fixed number of generations or when the fitness of an individual reaches a certain previously-fixed value (Ramillien 2001, Dal Moro 2007).

Before the inversion routine the modelling of dispersion curves was performed. Calculated models based on lithological information obtained from resistivity cross-sections. Models allowed to formed ranges of a search space where next GA looked for the fittest model of ground. Main inversion parameters – number of generations and number of individuals in one generation – were set as 30 generation and 30 individuals.

Beside seismic methods, the Resistivity Imaging (known also as electrical resistivity tomography, ERT) was carried out over the survey profile. Electrical resistivity surveys have been used for many decades in hydrogeological (Binley and

Table 2

The seismic result of ReMi and MASW for Sosnowiec–Pogoń profile

| Parameter | ReMi | | | MASW | | |
|------------------------------|----------|-----------------|--------------------|----------|-----------------|--------------------|
| | Layers | | | Layers | | |
| rock type | dry sand | fluvial deposit | Triassic limestone | dry sand | fluvial deposit | Triassic limestone |
| *Vs [m/s] | 167 | 272 | 2648 | 178 | 263 | 2679 |
| Vs *STD [m/s] | 4 | 4 | 421 | 1 | 2 | 485 |
| thickness [m] | 8.2 | 22.2 | Inf. | 8.7 | 26.0 | inf. |
| thickness *STD [m] | 0.5 | 0.8 | - | 0.2 | 5.3 | - |
| *Vp [m/s] | 348 | 566 | 5512 | 371 | 547 | 5577 |
| density [g/cm ³] | 1.80 | 1.92 | 2.47 | 1.81 | 1.91 | 2.47 |
| Vp/Vs ratio | 2.08 | 2.08 | 2.08 | 2.08 | 2.08 | 2.08 |
| Poisson ratio | 0.35 | 0.35 | 0.35 | 0.35 | 0.35 | 0.35 |
| shear modulus [MPa] | 50 | 142 | 17322 | 57 | 132 | 17750 |

*Vs – shear velocity, STD – standard deviations, Vp – primary wave velocity

Table 3

The seismic result of ReMi and MASW for Bytom–Karb profile

| Parameter | ReMi | | | MASW | | |
|------------------------------|----------|-------------|-----------------|----------|-------------|-----------------|
| | Layers | | | Layers | | |
| rock type | dry sand | loamy sands | the Muschelkalk | dry sand | loamy sands | the Muschelkalk |
| *Vs [m/s] | 209 | 326 | 2830 | 190 | 334 | 3007 |
| Vs *STD [m/s] | 2 | 8 | 352 | 6 | 16 | 558 |
| thickness [m] | 6.4 | 11.3 | Inf. | 6.8 | 10.2 | inf. |
| thickness *STD [m] | 0.3 | 0.9 | - | 0.6 | 0.8 | - |
| *Vp [m/s] | 435 | 679 | 5891 | 396 | 695 | 6260 |
| density [g/cm ³] | 1.85 | 1.96 | 2.49 | 1.83 | 1.97 | 2.50 |
| Vp/Vs ratio | 2.08 | 2.08 | 2.08 | 2.08 | 2.08 | 2.08 |
| Poisson ratio | 0.35 | 0.35 | 0.35 | 0.35 | 0.35 | 0.35 |
| shear modulus [MPa] | 81 | 208 | 19915 | 66 | 219 | 22619 |

*Vs – shear velocity, STD – standard deviations, Vp – primary wave velocity

Kenmna 2005, Kowalska *et al.* 2012), mining (Żogała *et al.* 2013) and geotechnical investigations (Rudzki 2002). More recently, it has been used for environmental surveys (Mendecki *et al.* 2012, Kowalczyk *et al.* 2014).

The goal of electrical measurements is to determine the subsurface resistivity distribution. From surface surveys the apparent resistivity is obtained and the real resistivity of the subsurface can be estimated by application of inversion techniques. The fundamental physical law used in resistivity surveys is Ohm's Law that governs the flow of current in the ground. This well-known method was applied for lithological changes recognition. Basics of the resistivity method and data inversion can be found in many studies and paper, especially in Telford *et al.* (1990), Loke *et al.* (2003), Loke (2004) and Binley and Kenmna (2005). Informations about electrical properties of rock are described e.g. in book of Schön (1996).

RESULTS

All seismic measurements were carried out with 115-meter-long profile on surface and provided the 1-D vertical S-waves profile on the center. The seismic result were referred to the central part of resistivity cross-section (Fig. 1)

because the middles of both surveys line were situated in the same place. Because different electrode spacing were applied, a different maximum depth of investigation were obtained. It resulted from accessibility of surface space in field.

Sosnowiec–Pogoń

The resistivity measurement were performed on 100-meter-long profile what allowed to obtain about 20 m maximum depth of investigation. The resistivity imaging result (Fig. 1a) mainly consists of relative higher resistivity anomaly (50–100 m) near surface on the entire length of the profile which is related to Quaternary dry sands. In those shallow structures can be distinguish additional higher anomaly with 100–200 m resistivity values. This layer is an anthropogenic remains after terrain leveling near to Faculty of Earth Sciences of University of Silesia. Beneath this complex large low resistivity anomaly with values of 0–50 m can be observed and it is related to fluvial deposit of Czarna Przemska River. Seismic results from ReMi and MASW yielded similar values for shallow structures. The S-wave velocities in dry Quaternary sands are about 167–178 m/s and thickness of this layer is about 8–9 m. The layer composed of mud and fine-grained sands deposit is characterized by Vs with values

in range of 220–260 m/s while a discrepancy of thickness value is observed in deeper layers. MASW interpreted it as 26 m but ReMi showed 22.2 m. Below Quaternary complex Triassic limestone can be found with S-waves velocities in range of 2600–2700 m/s. Thickness of limestone is assumed as infinity. Because resistivity profile was not long (maximal depth of investigation 19.7 m) the Triassic limestone are not present in central part of the cross-section. Probably, high resistivity anomaly in left part of the section is related to this rigid strata. In table 2 other elastic parameters are shown such as approximately values of density, Poisson ratio and shear modulus.

Bytom–Karb

In this case in central part of the 140-meter-long resistivity cross-section (Fig. 1b) three layer are interpreted. Shallow Quaternary dry sands with resistivity values 40–60 m which covered loamy sands characterized by low resistivity anomaly (0–40 m). This overburden is lying on the Triassic strata related to relative high resistivity values in range of 60 m up to 200 m. Both seismic result yield good correlation of layer thickness obtained from Resistivity Imaging. The shallowest layer is about 6.4–6.8 thick and has S-wave velocities in range of 190–210 m/s. The loamy sands are 10.2–11.3 thick and velocity range is about 320–340 m/s. The Triassic strata S-wave velocity ranges from 2800 to 3000 m/s and their thickness is assumed as infinity. Table 3 contains also information about elastic parameters as previous.

Chorzów–Chorzów Stary


The 200-meter-long resistivity profile (Fig. 1c) showed a Quaternary sand insert (200–500 m) in weathered Carboniferous dusty clays (0–100 m) which covers the Carboniferous rigid strata (200 m). Seismic method interpreted in the Quaternary insert two layers. The first low velocity layer about 90 m/s and 1.3–1.8 m thick. The second, consisting of coarse sands, is characterized by S-waves velocity in range of about 320–360 m/s and 8.1–8.7 m thick. Below are weathered rocks with relative lower value of velocity (287–342 m/s). This layer has a thickness discrepancy. ReMi showed that thickness is equal to 7.4 m but MASW – 9.3 m. The deepest layers are Carboniferous formations where S-waves velocities are changed in range of 2200–2800 m/s and this complex is treated as hemisphere. Table 4 contains all results obtained from both seismic technique.

DISCUSSION


All collected seismic data showed a satisfactory results (Fig. 2), especially for shallow structure, where waves propagate with relative higher frequency for both technique. However, different depth of consolidated rock can be observed in Sosnowiec and Chorzów profile (Fig. 2). It can be explained that the maximum propagated wavelength and hence, the investigation depth, is affected directly by the minimum frequency that can be generated and recorded.

The spatial sampling (receiver spacing) affects not only the minimum wavelength but also the lateral resolution of the spread. Lateral velocity variations and near-surface anoma-


Sosnowiec

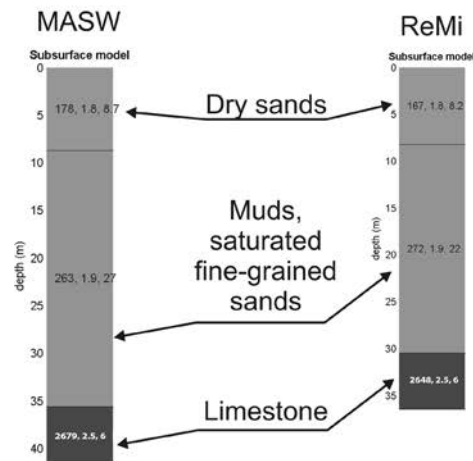

Bytom

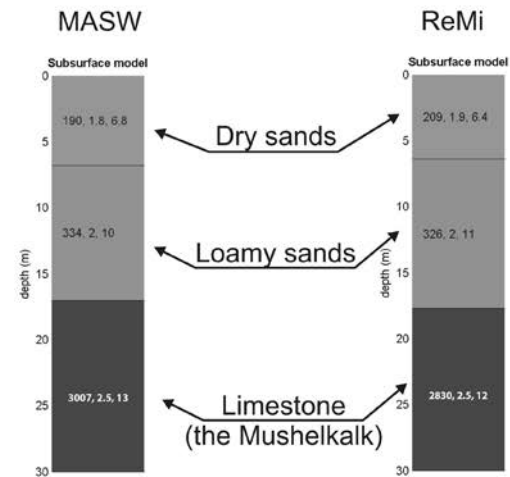

Chorzów

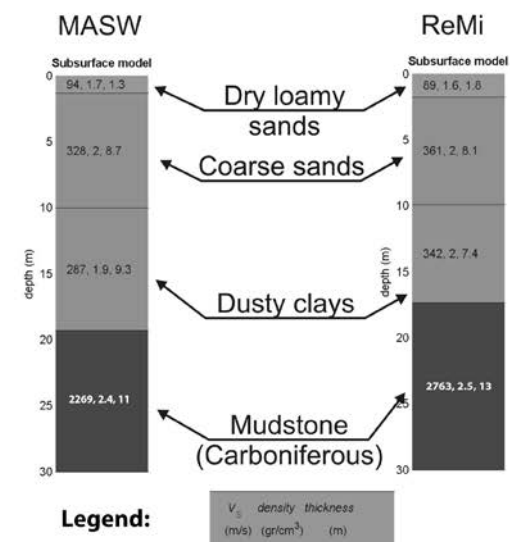

Legend:

V_p density thickness
(m/s) (g/cm^3) (m)

Fig. 2. Comparison of MASW and ReMi results obtained for selected sites. Results represent subsurface models with shear wave velocities (V_s), densities and thicknesses of interpreted layers.

Table 4

The seismic result of ReMi and MASW for Chorzów–Chorzów Stary profile

| | ReMi | | | | MASW | | | |
|------------------------------|----------------|--------------|-------------|----------------------|----------------|--------------|-------------|----------------------|
| | Layers | | | | Layers | | | |
| rock type | dry loam sands | coarse sands | dusty clays | Carboniferous strata | dry loam sands | coarse sands | dusty clays | Carboniferous strata |
| *Vs [m/s] | 89 | 361 | 342 | 2763 | 94 | 328 | 287 | 2269 |
| Vs *STD [m/s] | 2 | 6 | 12 | 285 | < 1 | 4 | 4 | 264 |
| thickness [m] | 1.8 | 8.1 | 7.4 | inf. | 1.3 | 8.7 | 9.3 | inf. |
| thickness *STD [m] | < 0.01 | 0.6 | 0.2 | - | < 0.01 | 0.7 | 0.4 | - |
| *Vp [m/s] | 185 | 751 | 712 | 5169 | 196 | 683 | 597 | 4245 |
| density [g/cm ³] | 1.65 | 1.98 | 1.97 | 2.45 | 1.66 | 1.96 | 1.93 | 2.41 |
| Vp/Vs ratio | 2.08 | 2.08 | 2.08 | 1.87 | 2.09 | 2.08 | 2.08 | 1.87 |
| Poisson ratio | 0.35 | 0.35 | 0.35 | 0.30 | 0.35 | 0.35 | 0.35 | 0.30 |
| shear modulus [MPa] | 13 | 259 | 231 | 18739 | 15 | 211 | 159 | 12389 |

*Vs – shear velocity, STD – standard deviations, Vp – primary wave velocity

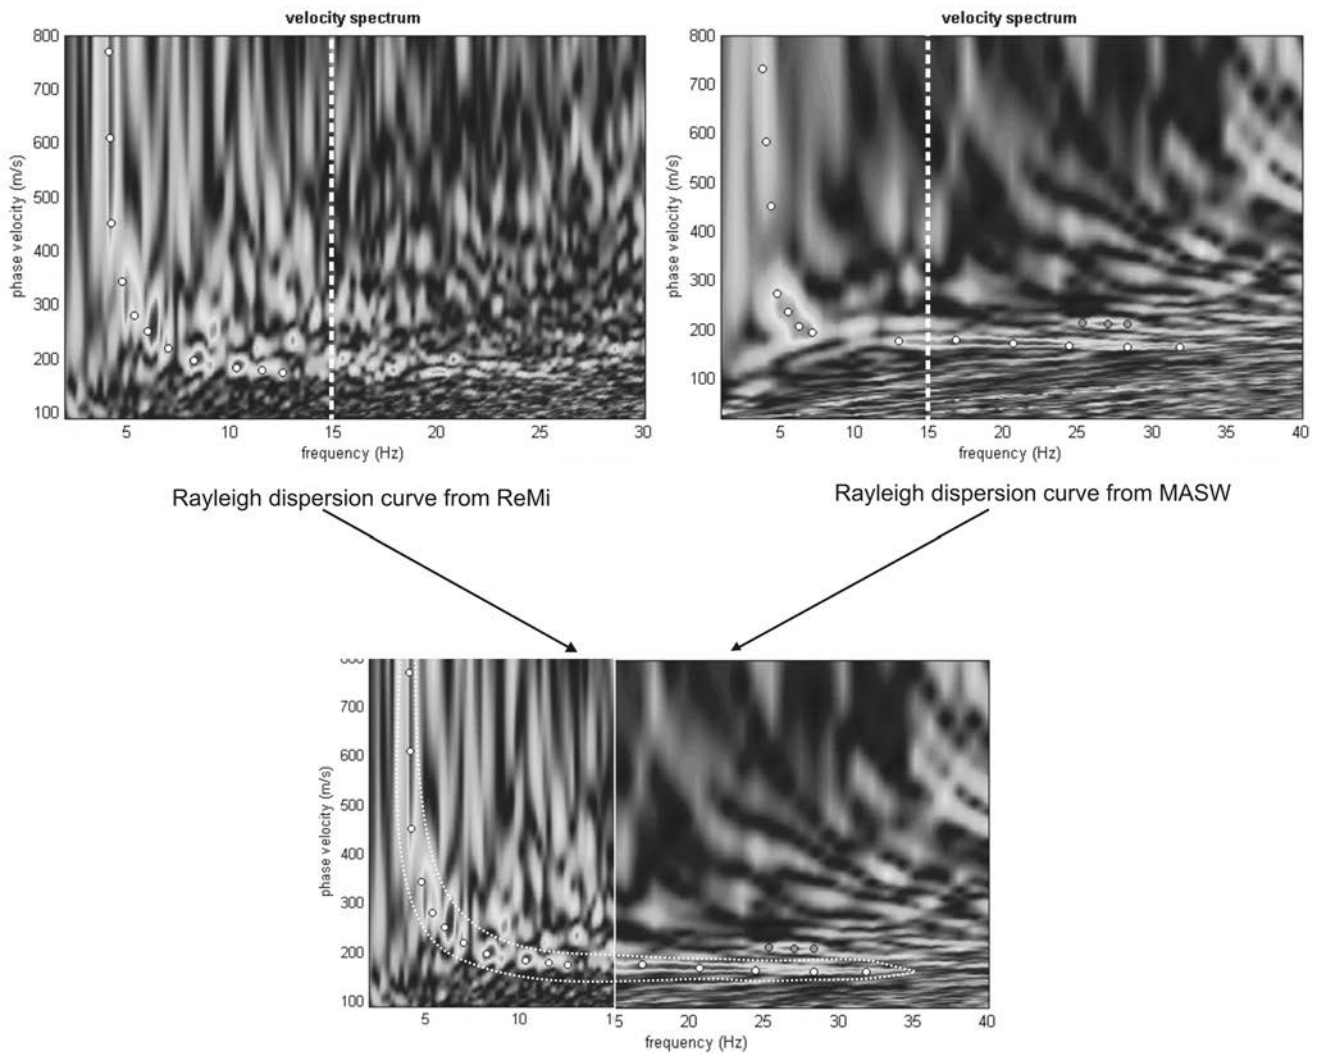


Fig. 3. Mapped entire shape of dispersion curves using data from low-frequency part of modes from ReMi are compared to relative higher-frequency part of Rayleigh modes from MASW.

lies are the main target of the near-surface characterization and they have to be properly spatially sampled (Strobbia *et al.* 2011). In this context, by their nature and proximity to the

geophone spread, it can be said that higher frequency active source surface waves resolve the shallower velocity structure and lower frequency passive source surface waves resolve

Table 5

Petrophysics characteristics of interpreted rocks – shear wave velocity (Vs), density, shear modulus and resistivity

| Rock type | Vs [m/s] | density [g/cm ³] | shear modulus [MPa] | resistivity [Ω m] |
|-----------------------------|-----------|------------------------------|---------------------|-------------------|
| coarse sands | 320–360 | 1.96–1.98 | 211–259 | 300–500 |
| dry sand (Sosnowiec) | 160–180 | 1.8 | 50–60 | 50–100 |
| dry sand (Bytom) | 190–210 | 1.8 | 66–81 | 40–60 |
| dry loam sands | 80–100 | 1.6 | 13–15 | 200–300 |
| loamy sands | 320–360 | 2 | 208–219 | 0–40 |
| muds (fluvial deposit) | 260–270 | 1.9 | 132–142 | 0–50 |
| dusty clays | 280–340 | 1.93–1.96 | 159–231 | 0–100 |
| Triassic limestone | 2600–2700 | 2.47 | 17300–17800 | 100–200 |
| the Muschelkalk (limestone) | 2800–3000 | 2.5 | 19900–22600 | 60–200 |
| Carboniferous strata | 2200–2800 | 2.4 | 12000–18700 | >300 |

the deeper velocity structure of the rock mass. When the total depth of interest is great enough to require use of passive source surveys, it is still very important to sufficiently sample the shallower depths (SeisImager/ SWTM Manual, 2009). In another words, ReMi technique yields more reliable results from deeper parts of the ground. Furthermore, it could be suggested that both technique should be applied together and shallow structure could be recovered by MASW and deeper layer, especially location of bedrock, could be found by ReMi. Application of both method allowed to reproduce entire shape of dispersion curves when low-frequency part of modes from ReMi are compared to relative higher-frequency part of Rayleigh modes from MASW (Fig. 3).

The considered methods of seismic and resistivity imaging indicated an effective recognition of subsurface Quaternary sediments. The resistivity imaging method allowed to create resistivity cross-sections which showed the changes in spatial distribution of different lithology, while the seismic methods detailed the petrophysical parameter information of observed layers. Such data set, obtained from different methods, allows to carry out a comprehensive study of subsurface structures both for cognitive aims as well as for geotechnical tasks. Due to the presented information and the lack of conclusive results for bedrock it was assumed that the ReMi method results are more reliable. In other words, the data set from shallow layers, obtained by MASW and a data set from deep layers, obtained by ReMi, should be used to further study.

Synthetic studies of Quaternary sediments at selected locations are presented in Table 5 selected only the most important petrophysical parameters studied rocks: S-wave velocity, density, shear modulus and resistivity. Results showed some similarities in values for different site. Slight variations could be caused by differ mineral contents in porous media or small differences in matrix compositions. Quaternary dry sands in each site could be a coarse sands, an increase of petrophysics parameter may be caused by increase of water content and possible clay content in porous space. Coarse sand is very loose material which should be characterized by the lowest values of elastic parameters. The presence of additional content changes those values what is observed in table 5. More complicated geology in Chorzów site showed that dusty clays could have lower elastic parameters than coarse sands. How-

ever, one could expect the opposite results. The ReMi results showed that both sediments do not differ significantly from each other. The MASW method yielded lower values and it could be result of inappropriate wave propagation from source to receivers. In table 5 parameters are mainly presented are ranges of values where the edges are the ReMi and MASW values. Results for other rocks indicated a good correlation and could be used as a reference to later studies of subsurface layers and consolidated substrate.

CONCLUSIONS

1. The passive seismic survey in urban area allowed to distinguish Rayleigh dispersion curves on phase velocity spectrum. Anthropogenic noise generated by streets and routes was strong enough and was characterized by relative high frequency, so can be registered by 4.5 Hz geophones.
2. Passive survey can be applied in areas where interference of artificial source is forbidden such as DC emission or sledgehammer impact.
3. Resistivity cross-sections are characterized by very small absolute error from 1.5% up to 4.5% what can suggest that results are reliable. It is also can be confirmed by good agreement between thicknesses of layers resistivity data and thicknesses obtained from seismic methods.
4. Application of both method: MASW and ReMi can correct to inversion solution and makes subsurface model more appropriate because both technique better mapped different part of Rayleigh dispersion curve (Fig. 3).

Acknowledgements

The project was funded by the National Science Centre granted under Decision No UMO-2012/05/N/ST10/03943.

REFERENCES

- Binley, A., Kenmna, A., (2005), DC Resistivity and Induced Polarization Methods. In eds Rubin, Y., Hubbard, S.S., Hydrogeophysic, 50, 129–156, Springer.
- Boiero, D., Socco, L.V., 2011. The meaning of surface wave dispersion curves in weakly laterally varying structures. Near Surface Geophysics, 9, 561–570.
- Cudak, J., Wantuch, A. (2009) Chorzów [In:] Wody podziemne miast Polski. Miasta powyżej 50 000 mieszkańców, ed. Z.

- Nowicki. Państwowy Instytut Geologiczny Warszawa. (Website accessed 26.04.2014) <http://www.psh.gov.pl/plik/id,4743.pdf>.
- Dal Moro, G., Pipan, M., Gabrielli, P., 2007. Rayleigh wave dispersion curve inversion via genetic algorithms and marginal posterior probability density estimation. *Journal of Applied Geophysics*, 61, 39–55.
- Eker, A.M., Akgün, H., Koçkar, M.K., 2012. Local site characterization and seismic zonation study by utilizing active and passive surface wave methods: A case study for the northern side of Ankara, Turkey. *Engineering Geology*, 151: 64–81.
- Gamal, M.A., Pullammanappallil, S., 2011. Validity of the Refraction Microtremors (ReMi) Method for Determining Shear Wave Velocities for Different Soil Types in Egypt. *International Journal of Geosciences*, 2, 530–540.
- Hamimu, L., Safani, J., Nawawi, M., 2011. Improving the accurate assessment of a shear-wave velocity reversal profile using joint inversion of the effective Rayleigh wave and multimode Love wave dispersion curves. *Near Surface Geophysics*, 9, 1–14.
- Kowalczyk, S., Zawrzykraj, P., Mieszkowski, R., 2014. Application of electrical resistivity tomography in assessing complex soil conditions. *Geological Quarterly*, 59, 2, (in print).
- Kowska, A., Kondracka, M., Mendecki, M.J., 2012. VLF mapping and resistivity imaging of contaminated Quaternary formations near to „Panewniki” coal waste disposal. *Acta Geodynamica et Geomaterialia*, 9, 4 (168), 473–480.
- Lambert, D.W., Adams, G., Hawley, V., 2007. Use of refraction microtremor (REMI) data for shear wave velocity determination at an urban bridge rehabilitation site. *Proceedings of the Geophysics 2006 conference, Dec 40-7th, 2007, St. Louis, Missouri, USA*.
- Loke, M.H., Acworth, I. and Dahlin, T., 2003. A comparison of smooth and blocky inversion methods in 2-D electrical imaging surveys. *Exploration Geophysics* 34(3), 182–187.
- Loke, M.H., 2004. Tutorial: 2-D and 3-D electrical imaging surveys. (Website accessed 26.04.2014) <http://www.geoelectrical.com>.
- Louie, J.N., 2001. Faster, Better: Shear-Wave Velocity to 100 Meters Depth from Refraction Microtremor Arrays. *Bulletin of the Seismological Society of America*, 91, 2, 347–364.
- Liu, H. P., D. M. Boore, W. B. Joyner, D. H. Oppenheimer, R. E. Warrick, W. Zhang, J. C. Hamilton, Brown L.T., 2000. Comparison of phase velocities from array measurements of Rayleigh waves associated with microtremor and results calculated from borehole shear wave velocity profiles, *Bull. Seism. Soc. Am.* 90, 666–678.
- Mendecki, M.J., 2012. Zastosowanie testu statystycznego Albarello do wykrywania fałszywych maksimów na widmach HVSR uzyskanych z szumu sejsmicznego zarejestrowanego w Ojcowie, Raciborzu i Planetarium Śląskim. (Application of the Albarello statistical test to detect false peaks in the spectra obtained from the HVSR seismic noise recorded in the Ojcow, Raciborz and Silesian Planetarium). *Bezpieczeństwo Pracy i Ochrona Środowiska w Górnictwie, Miesięcznik WUG*, 9, 36–40 (in Polish).
- Mendecki, M.J., Zuberek, M.W., Hrehorowicz, P., Jarek, S., 2012. An inversion of Rayleigh waves dispersion curves as a tool to recognize the bedrock depth in Chorzów Stary, Poland. *Contemporary Trends in Geoscience*, 1, 39–44.
- Nakamura, Y., 1989. A method for dynamic characteristics estimation of subsurface using microtremor on the ground surface. *Quarterly Report of Railway Technical Research Institute*, 30, 1, 25–33.
- Park, C.B., Miller, R.D., Xia, J., 1999. Multichannel Analysis of Surface Waves. *Geophysics*, 64, 3, 800–808.
- Pullammanappallil, S., Honjas, B., Louie, J., Siemens, J. A., Miura, H., 2003. Comparative Study of the Refraction Microtremors Method: Using Seismic Noise and Standard P-Wave Refraction Equipment for Deriving 1D Shear-Wave Profiles. *Proceedings of the 6th SEGJ International Symposium, Tokyo, January 2003*, 192–197.
- Ramillien, G., 2001. Genetic algorithms for geophysical parameter inversion from altimeter data. *Geophys. J. Int.* 147, 393–402.
- Razowska-Jaworek, L., Brodziński, I., 2009. Bytom [In:] *Wody podziemne miast Polski. Miasta powyżej 50 000 mieszkańców*, ed. Z. Nowicki. Państwowy Instytut Geologiczny Warszawa. (Website accessed 26.04.2014) <http://www.psh.gov.pl/plik/id,4742.pdf>.
- Rosenblad, B.L., Li, J., 2009. Comparative Study of Refraction Microtremor (ReMi) and Active Source Methods for Developing Low-Frequency Surface Wave Dispersion Curves. *Journal of Environmental & Engineering Geophysics*, 14, 101–113.
- Rudzki, M., 2002. Zastosowanie metody tomografii elektrooporowej do wykrywania podziemnych obiektów antropogenicznych. (Application of electrical resistivity tomography to detect subsurface man-made objects) *Publications of The Institut of Geophysics Polish Academy of Sciences: Geophysical Research of Geological Environment, Monographic Volume M-27(352)*, 195–208 (in Polish).
- Satoh, T., Kawase, H., Iwata, T., Irikura K., 1997. S-wave velocity structures in the damaged areas during the 1994 Northridge earthquake based on array measurements of microtremors (abstract), *EOS Trans. AGU* 78, no. 46, 432.
- Stephenson, W. J., Louie, J. N., Pullammanappallil, S., Williams, R. A., Odum, J. K., 2005. Blind shear-wave velocity comparison of ReMi and MASW results with boreholes to 200 m in Santa Clara Valley: Implications for earthquake ground motion assessment, *Bull. Seis. Soc. Amer.*, 95, 6, 2506–2516.
- SeisImager/SWTM Manual, 2009. Geometrics, Inc.
- Schön, J.H., 1996. *Physical Properties of rocks*, Pergamon.
- Strobbia, C., Laake, A., Vermeer, P., Glushchenko, A., 2011. Surface waves: use them then lose them. *Surface-wave analysis, inversion and attenuation in land reflection seismic surveying. Near Surface Geophysics*, 9, 503–514.
- Telford, W.M., Geldart, L.P. and Sheriff, R.E., 1990. *Applied Geophysics*, 2nd ed. Cambridge University Press, Cambridge.
- Wagner, J., Rolka, M., Zembal, M. (2009) *Sosnowiec* [In:] *Wody podziemne miast Polski. Miasta powyżej 50 000 mieszkańców*, ed. Z. Nowicki. Państwowy Instytut Geologiczny Warszawa. (Website accessed 26.04.2014) <http://www.psh.gov.pl/plik/id,4762.pdf>.
- Wyciółkowski, J., 1957. *The Detailed Geological Map of Poland, scale 1:50 000, sheet Zabrze, M34-62A*, Geological Institute, Warsaw (in Polish).
- Xia, J., Miller, R.D., Park, C.B., 1999. Estimation of near-surface shear-wave velocity by inversion of Rayleigh waves. *Geophysics*, 64, 3, 691–700.
- Żogała, B., Gołębiowski, T., Mendecki, M., Antonik, W., Zuberek, W.M., Panajew, P., 2013. Determination of the fracture zone extension around the mine opening with the resistivity and GPR methods. In eds M. Kwasniewski, D. Lydzba *Rock Mechanics for Resources, Energy and Environment*, 181–188, CRC Press/Balkema.